




Specifications

Die Grinder

 Double Insulation

 Variable Speed

 Electronic speed control

 Soft Start feature

GD0800C

Continuous rating
Input 750 W
Collet capacity 8 mm or 1/4"
No load speed 7,000 - 28,000 min⁻¹ (rpm)
Overall length 371 mm (14-5/8")
Net weight 1.6 kg (3.5 lbs)
Power supply cord 2.5 m (8.2 ft.)

GD0810C

Continuous rating
Input 750 W
Collet capacity 8 mm or 1/4"
No load speed 1,800 - 7,000 min⁻¹ (rpm)
Overall length 371 mm (14-5/8")
Net weight 1.7 kg (3.7 lbs)
Power supply cord 2.5 m (8.2 ft.)

Standard equipment


Die Grinder

	Part No.
Collet Cone 6 Ass'y (ø6 mm)	193012-1
Wrench 13	781203-2
Wrench 19	781206-6

Optional accessories

Die Grinder

Wheel point (10 per pkg.)
Abrasive material
A : To grind mild steel, carbon steel, etc.
WA : To grind hardened and special steels.
* 1 per pkg.



No.	Wheel dia. (mm)	Shank size	Abrasive material	Part No.
1	5	3 mm	A	794050-2
	6			794051-0
	8			794052-8
	10			794053-6
2	5	3 mm	WA	794054-4
	6			794055-2
	8			794056-0
	10			794057-8
3	5	3 mm	A	794058-6
	10			794059-4
1	19	6 mm	WA	* 741614-3
		1/4"		* 741617-7
4	19	6 mm	WA	* 741615-1
		1/4"		* 741616-9

	Part No.
Side Handle Set	193162-2
Vise Holder	193141-0
Collet Cone 3 Ass'y (ø3 mm)	193011-3
Collet Cone 8 Ass'y (ø8 mm)	192988-9
Collet Cone 1/4" Ass'y (ø1/4")	193143-6
Collet Cone 1/8" Ass'y (ø1/8")	193144-4

Makita Corporation

3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan

PRINTED IN JAPAN Z14285-2 2000-4




 Double Insulation


Die Grinder


8 mm (1/4") Model GD0800C (High Speed Type)
Model GD0810C (Low Speed Type)


Makita New Heavy Duty Die Grinders For Professionals
Featuring High Power Motor. Longer Tool-Life Thanks
To Makita Original "Super Joint System - SJS"



 Double Insulation

 Electronic speed control

 Variable Speed

 Soft Start feature

NEW



Robust die grinders featuring high power motor and the most efficient dust proof construction.

1. Shaped tip, double-neck aluminum gear housing

ø 43 mm (1-11/16") neck: Optional side handle can be installed.

ø 35 mm (1-3/8") neck: Optional vise holder can be installed.

134 mm (5-1/4")

Rugged, aluminum gear housing with great accessibility to difficult-to-reach spots thanks to its streamline shape. Ideal size for vice or drill stand.

Max collet capacity 8 mm or 1/4"

Model GD0800C

GD0800C, high speed type, is the versatile straight grinder, ideal for grinding and sharpening in confined spaces.

High power & Heavy-Duty motor

Makita newly designed motor makes it possible to produce the highest power 750W in its class with palm-fitting slim body. Zig-zag and powdered varnish coating on armature and field assures high durability and protects against grinding dust.

Electronic speed controller

Electronic speed control maintains constant speed under load. Soft start feature assures smoother start. Electronic clutch always controls the current and reduces it to much extent when the tool locked for protecting motor.

Highly durable cord guard

Speed control dial

For getting optimal speed to match the materials.

Speed control position	No load speed (rpm. = min ⁻¹)	
	GD0800C	GD0810C
1	7,000	1,800
2	10,000	2,400
3	17,000	4,100
4	24,000	5,800
5	28,000	7,000

Low noise: GD0800C 77 dB
GD0810C 76 dB


Model GD0810C

GD0810C, low speed type, with very high torque, ideal for grinding and facing work using brushes, flap discs and points.

"Super Joint System-SJS"

Smooth and comfortable grinding work
Absorbing shocks by accidental wheel lock during operation to protect gear, collet and coupling for longer tool-life


Makita original design, Super Joint System-SJS offers following benefits

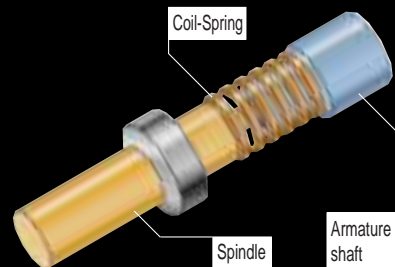

Utilizing such a characteristic of Coil-Spring that an extended Coil-Spring has more tightening force, armature shaft is connected securely to Spindle with specially designed Coil-Spring.


- Start rotation of armature shaft
 - With the rotation of armature shaft, Coil-Spring is extended and its tightening force increases to grasp the armature shaft and the spindle. Now the gear and the spindle start rotating simultaneously.
- Against the shock by accidental spindle lock or overload which surpasses the limited torque designed for the tool, the Coil-Spring will be in slippery condition. This will prevent the damage of armature and assure smoother grinding work.

Longer tool-life also assured by dust-protected construction (Labyrinth Construction), dust protected bearings and sealing employed.

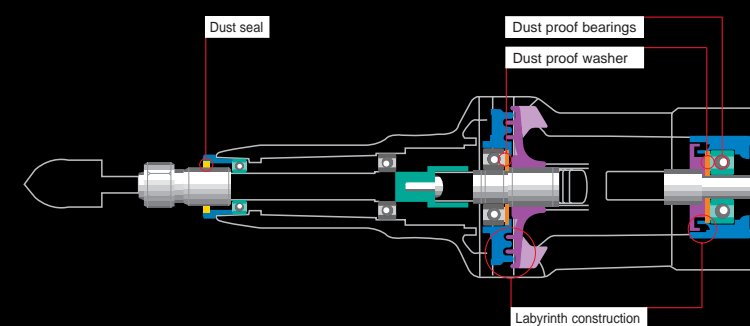

Labyrinth construction seals out dust/dirt from bearings

2. Air-cooling ports designed user-friendly

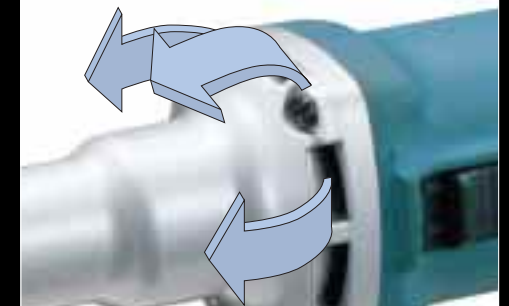

Cooling air always flows toward the front of the tool for comfortable operation. Air-cooling ports are positioned not to be covered with user's hand for efficient cooling effect.